

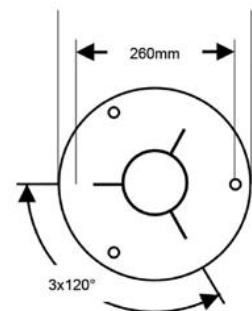


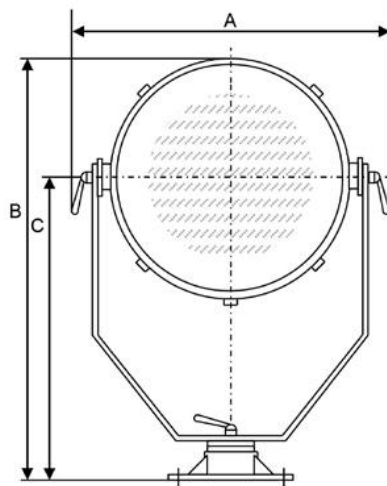

DS 351 HGS
24 V -500 W

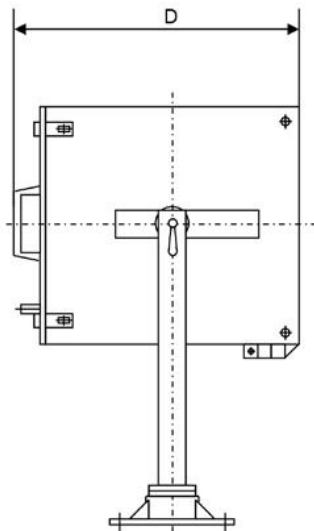

Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>



DS 351 HGS 24 V -500 W

Type: DS351HGS24500
Electrical data: 24V 500W E40

Construction features :

Case and all other aluminium parts are made of ALMg3, non magnetic.

Reflector:

high-polished aluminium 99,99%, anodized,
diameter 360mm, focal distance 80mm

Front Pane:

bi-veteral glas, resistant to temperature changes

Sealing:

Seal for front Pane: silicone tube
Seal for plug-in unit: square bar rubber

Lampsocket:

E40

Electrical Equipment:

Halogen Lamp 500 W
Burning Position vertical

Options:

Technical data lamp:

Power	500 VA
Voltage	24 V
Current intensity	20,8 A
Luminous flux	9800 lm
Average burning life	50 Hours

Searchlight:

DIN-Range at 1 Lux:	1200 m
IES-Range at ¼ Lux :	2400 m
Beam with at 50 % I _{max} :	3,5°
Light spot size at target	± 75 m
Power input 230V 1000 VA	
Protective System IP 56	

Turning range:

Horizontal : +/- 165°
Vertical : +/- 30°